


PT100 probe for compost and wheat with output 4-20mA and ATEX - cod. SCD



Protective sheath: 316 L stainless steel, Ø 16 x 2 mm;
Probe: Pt100 ceramic IEC 60751 class A, single winding in 3-wire assembly;
Connection head: DAN type in aluminum alloy epoxy coated or Bush type with window for the version with display (the 4-20mA converter is necessary for operate the display), cable outlet by polyamide cable gland (M20 x 150), clamping Ø from 5 to 12 mm;
Operating temperature: -20 to +100 °C;

Other length or other diameter on request
Other possible use: all storage in heaps (potatoes soil, fertilizer, cereals, etc.)

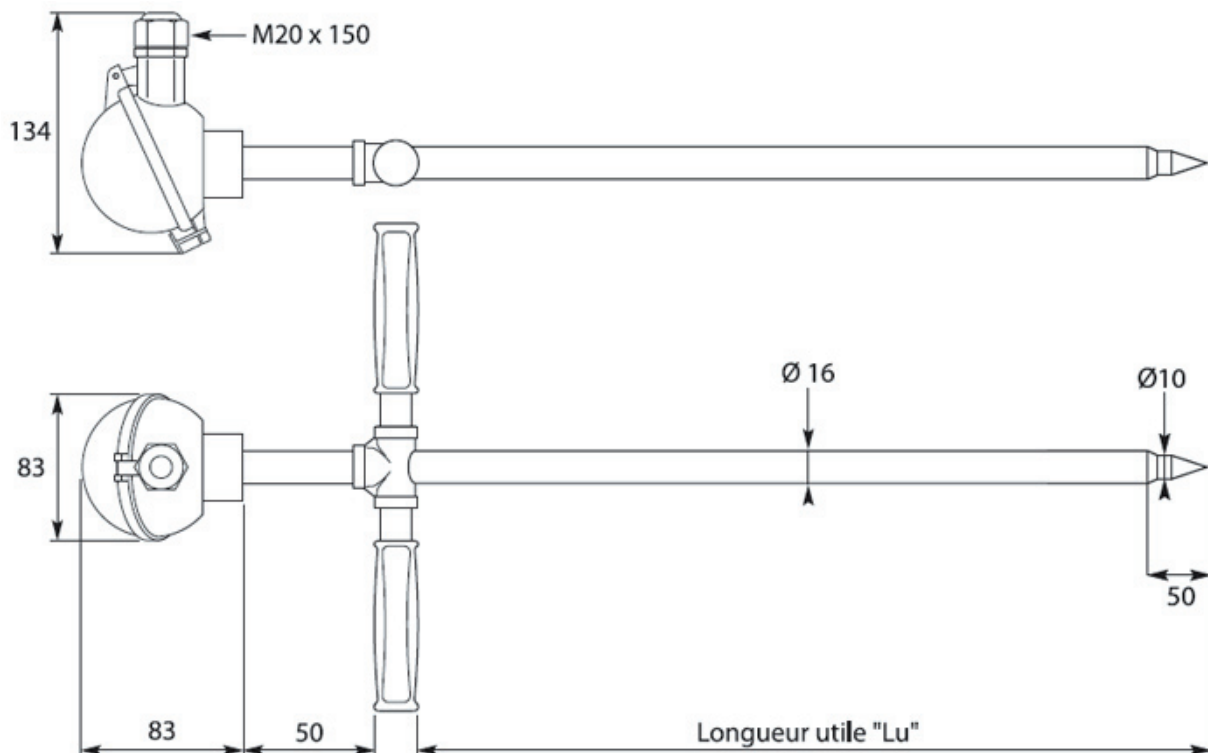

	"Lu"	Option 1	Option 2	
Réf. SCD		-		
1000 mm	1000	AT	EX	version 
1500 mm	1500			
2000 mm	2000			
2500 mm	2500			
		4-20 mA transmitter with 2-wire technique	F	display